
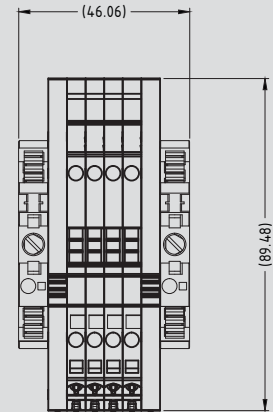


Passive Feed Through Assembly

- WMF 2.5 BLZ Terminal Assembly
- Dekafix markers included
- Secured with rubber band
- 4 channel version
- With pluggable BLZ interface



Technical data

Connection data	
Process side	Screw connection
Type	WMF 2.5 BLZ Terminals
Torque	4.4 in – lbs (0.5 Nm)
Control side	Screw connection / Pluggable BLZ
Rated data	
Rated voltage	300V
Max. current per channel	10A
Operating temperature	-50°C to +120°C (Thermoplastic)
Storage temperature	
General Features	
LED status indicator per channel	-
Disconnection per channel	-
Voltage measuring test points	-
Current measuring test points	-
Fuse via channel	-
Supply voltage LED status	-
Power supply fuse	-
Terminal wire size	
Terminal Insulation stripping length	AWG 26 ... 12
BLZ Insulation stripping length	10mm
	7mm
Approvals	
Standards	cURus (E141197)
Dimensions	
Length x width x height (inches / mm)	3.5 x 1.85 x 1.8 / 90 x 47 x 45
Note	

Ordering data

Model	Qty	Part No.
Pam assembly WMF 4-CH BLZ 4; Screw connection	1	6760005174
Note		

Accessories

Optional Cable	
Note	