
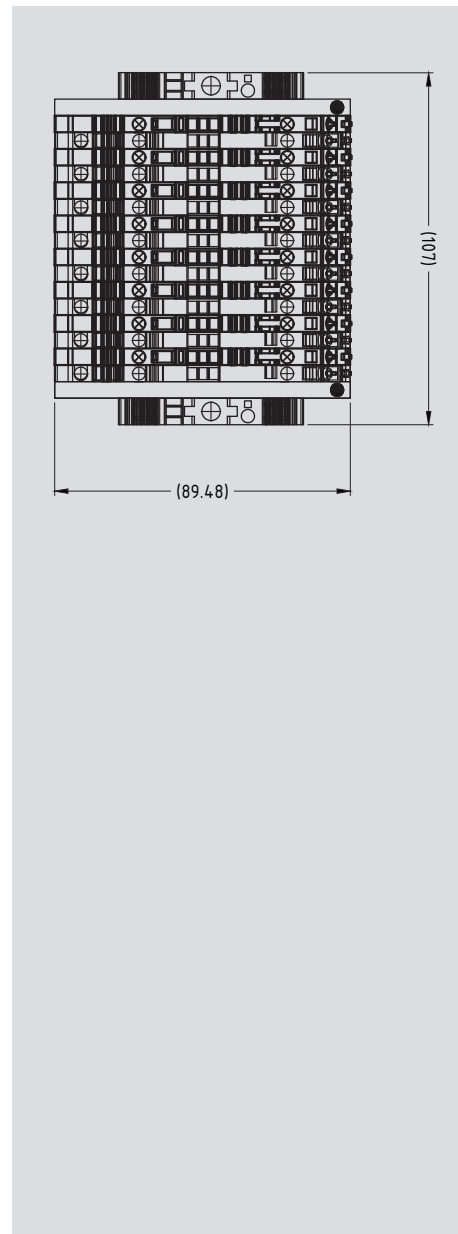


Passive Feed Through Assembly

- WMF 2.5 BLZ Terminal Assembly
- WS 8/5 MC markers included
- Secured with rubber band
- 8 and 16 channel versions
- With integrated ground connection
- With pluggable BLZ interface
- Disconnect for each channel



Technical data

Connection data		
Process side		
Type	Screw connection	
Torque	WMF 2.5 BLZ and WMF 2.5 DI BLZ Terminals 4.4 in - lbs (0.5 Nm)	
Control side	Screw connection / Pluggable BLZ	
Rated data		
Rated voltage	300V	
Max. current per channel	10A	
Operating temperature	- 50°C - + 120°C (Thermoplastic)	
Storage temperature		
General Features		
LED status indicator per channel	-	
Disconnection per channel	Yes	
Voltage measuring test points	-	
Current measuring test points	-	
Fuse via channel	-	
Supply voltage LED status	-	
Power supply fuse	-	
Terminal wire size		
Terminal Insulation stripping length	AWG 26 ... 12 10mm	
BLZ Insulation stripping length	7mm	
Approvals		
Standards	cURus (E141197)	
Dimensions		
Length x width x height (inches / mm)	3.5 x 4.2 x 1.8 / 90 x 107 x 45	
8 channel/ 16 terminals		
Note		
Disconnect location shown on drawing		
Ordering data		
Model	Qty	Part No.
8-Channel Pam assembly WMF 8-CH BLZ 16; Screw/Plug Connection	1	6760005175
Note		
With PE Rail connection		