


Passive Feed Through Assembly

- WMF 2.5 BLZ Terminal assembly
- WS 8/5 MC markers included
- Secured with rubber band
- 8 and 16 channel versions
- With integrated ground connection
- With pluggable BLZ interface
- Disconnect for each channel

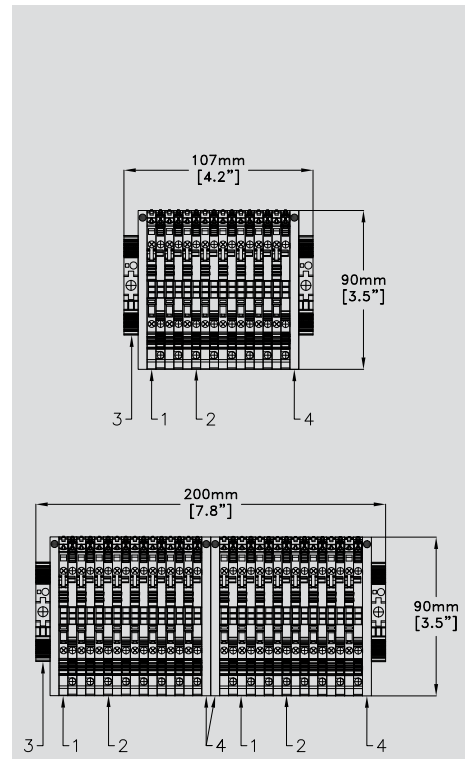

Technical data

Connection data	
Process side	Screw connection
Type	
Torque	4.4 in - lbs (0.5 Nm)
Control side	Screw connection / Pluggable BLZ
Type	
Rated data	
Rated voltage	300V
Max. current per channel	19A
Operating temperature	- 50°C - +120°C
Storage temperature	
General Features	
LED status indicator per channel	-
Disconnection per channel	Yes
Voltage measuring test points	-
Current measuring test points	-
Fuse via channel	-
Supply voltage LED status	-
Power supply fuse	-
Terminal wire size	
Insulation stripping length	AWG 26 ... 12 10 mm
Approvals	
Standards	
Dimensions	
Length x width x height (inches / mm)	
8 channel/ 16 terminals	3.5 x 4.2 x 1.8 / 90 x 107 x 45
16 channel/ 32 terminals	3.5 x 7.8 x 1.8 / 90 x 200 x 45
Note	

Ordering data

	Model	Qty	Part No.
Screw connection, 8 channel	Pamassembly WMF 8 CH BLZ 16 Terminals	1	6760005175
Screw connection, 16 channel	Pamassembly WMF 16 CH BLZ 32 Terminals	1	6760005176
Note			

Accessories