
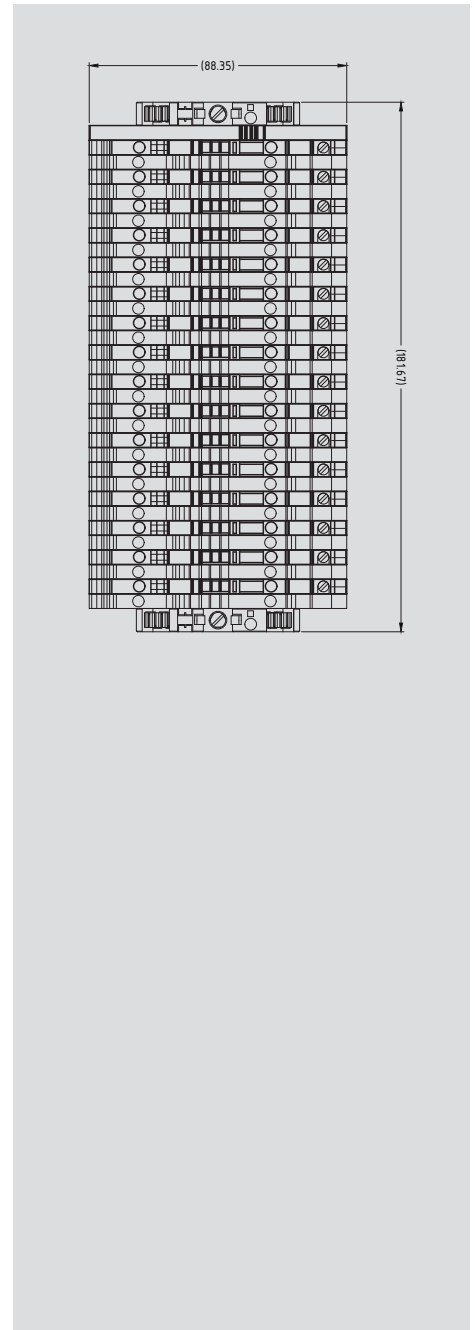


### Passive Feed Through Assembly

- WMF 2.5 Terminal Assembly with disconnects
- Dekafix markers included
- Secured with rubber band
- 16-channel version
- Screw connection to Screw connection
- Disconnect for each channel

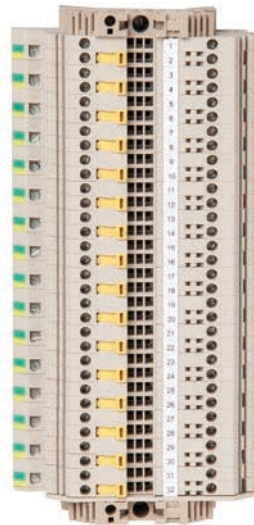

### Technical data

| Connection data  |                                      |            |
|--|--------------------------------------|------------|
| Process side   | Screw connection                     |            |
| Type   | WMF 2.5 and WMF 2.5 DI PE Terminals  |            |
| Torque   | 4.4 in - lbs (0.5 Nm)                |            |
| Control side   | Screw connection                     |            |
| Rated data   |                                      |            |
| Rated voltage  | 300V                                 |            |
| Max. current per channel                               | 15A                                  |            |
| Operating temperature                                  | - 50°C - +120°C (Thermoplastic)      |            |
| Storage temperature                                    |                                      |            |
| General Features                                       |                                      |            |
| LED status indicator per channel                       | -                                    |            |
| Disconnection per channel                              | Yes                                  |            |
| Voltage measuring test points                          | -                                    |            |
| Current measuring test points                          | -                                    |            |
| Fuse via channel                                       | -                                    |            |
| Supply voltage LED status                              | -                                    |            |
| Power supply fuse                                      | -                                    |            |
| Terminal wire size                                     |                                      |            |
| Terminal Insulation stripping length                   | 10mm                                 |            |
| Approvals  |                                      |            |
| Standards  | cURus (E141197)                      |            |
| Dimensions   |                                      |            |
| Length x width x height (inches / mm)                  | 3.5 x 7.2 x 1.8 / 89 x 182 x 45      |            |
| Note   |                                      |            |
|  | Disconnect location shown on drawing |            |
| Ordering data  |                                      |            |
|  |                                      |            |
| Model  | Qty                                  | Part No.   |
| Pam assembly 16-Channel WMF Standard; Screw connection | 1                                    | 6760005178 |
| Note   |                                      |            |
| With PE Rail connection                                |                                      |            |