


**Passive Feed Through Assembly**

- WMF 2.5 BLZ Terminal Assembly with disconnects
- Dekafix markers included
- Secured with rubber band
- 8-channel version
- With pluggable BLZ interface
- Disconnect for each channel

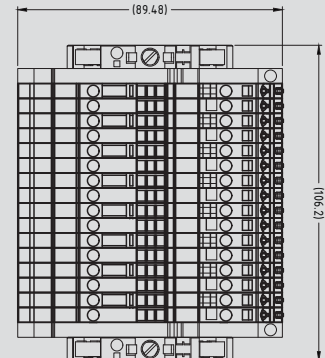

**Technical data**

Connection data	
Process side	Screw connection
Type	WMF 2.5 BLZ and WMF 2.5 DI BLZ
Torque	4.4 in - lbs (0.5Nm)
Control side	Screw connection/Pluggable BLZ
Rated data	
Rated voltage	300V
Max. current per channel	10A
Operating temperature	-50°C to +120°C (Thermoplastic)
Storage temperature	
General Features	
LED status indicator per channel	-
Disconnection per channel	Yes
Voltage measuring test points	-
Current measuring test points	-
Fuse via channel	-
Supply voltage LED status	-
Power supply fuse	-
Terminal wire size	
Terminal Insulation stripping length	10mm
BLZ Insulation stripping length	7mm
Approvals	
Standards	cURus (E141197)
Dimensions	
Length x width x height (inches / mm)	3.6 x 4.3 x 1.8 / 90 x 107 x 45
Note	
	Disconnect location shown on drawing

**Ordering data**

Model	Qty	Part No.
Pam assembly 8-Channel WMF BLZ; Screw/Plug connection	1	<b>6760005179</b>
Without PE Rail connection		

**Note**