


Passive Feed Through Assembly

- WMF 2.5 BLZ Terminal Assembly with disconnects
- Dekafix markers included
- Secured with rubber band
- 16-channel version
- With pluggable BLZ interface
- Disconnect for each channel

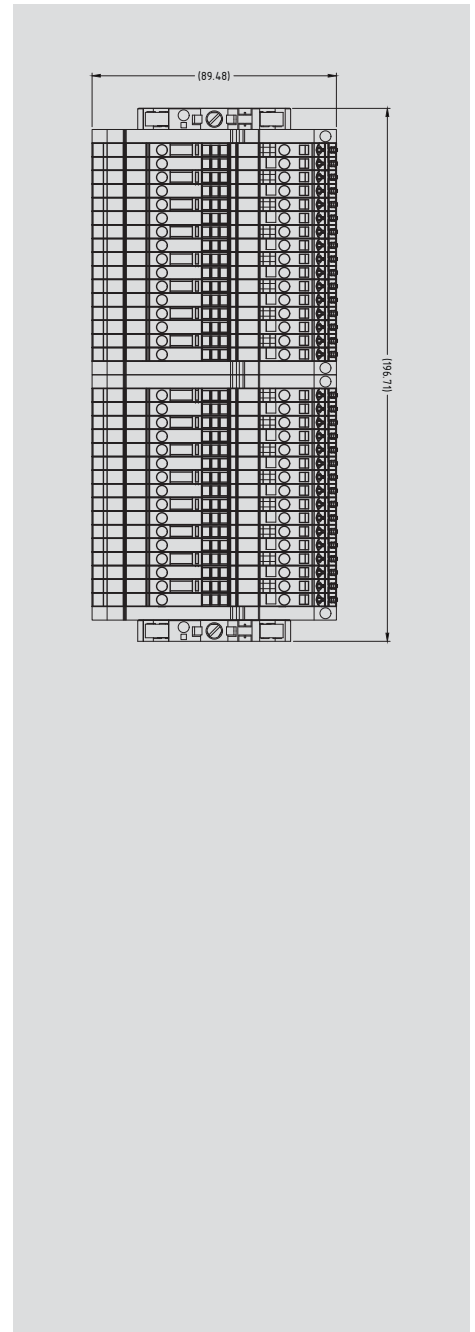

Technical data

Connection data		
Process side	Screw connection	
Type	WMF 2.5 BLZ and WMF 2.5 DI BLZ	
Torque	4.4 in - lbs (0.5 Nm)	
Control side	Screw connection / Pluggable BLZ	
Rated data		
Rated voltage	300V	
Max. current per channel	10A	
Operating temperature	- 50°C - +120°C (Thermoplastic)	
Storage temperature		
General Features		
LED status indicator per channel	-	
Disconnection per channel	Yes	
Voltage measuring test points	-	
Current measuring test points	-	
Fuse via channel	-	
Supply voltage LED status	-	
Power supply fuse	-	
Terminal wire size		
Terminal Insulation stripping length	10mm	
BLZ Insulation stripping length	7mm	
Approvals		
Standards	cURus (E141197)	
Dimensions		
Length x width x height (inches / mm)	3.6 x 7.8 x 1.8 / 90 x 197 x 45	
Note		
Disconnect location shown on drawing		
Ordering data		
Model	Qty	Part No.
Pam assembly 16-Channel WMF BLZ ; Screw/Plug connection	1	6760005180
Without PE Rail connection		
Note		